

Precision Multi-Channel Power Analyzer

XT2640 Series


Vitrek's XT2640 is three power analyzers in a single chassis with a single interface. The XT2640 may have up to 4 Channels installed or optionally with the MU option combine units to grow to thousands of channels, which may be any combination of channel cards and with any combination of available current input options.

Quality and Reliability


Vitrek, founded in 1990, is the premier source of precision power testing and measuring equipment for industrial and consumer product development and manufacturing. Vitrek's sophisticated technology provides companies the edge in design verification and product manufacturability.




History Displays

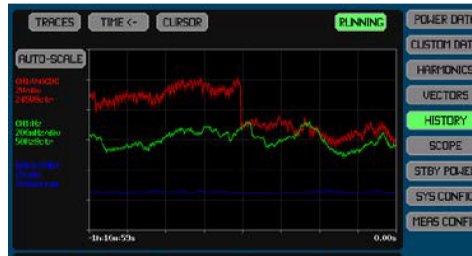


Vector Diagrams

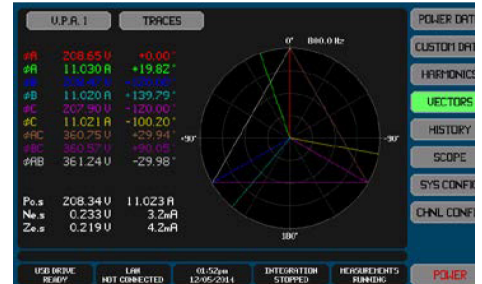


Harmonics Displays with Limits

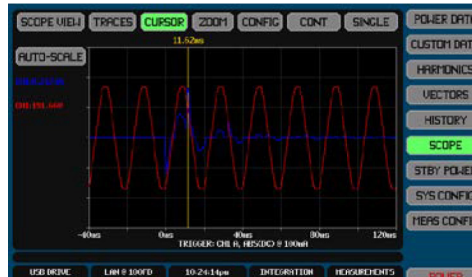

Oscilloscope Displays

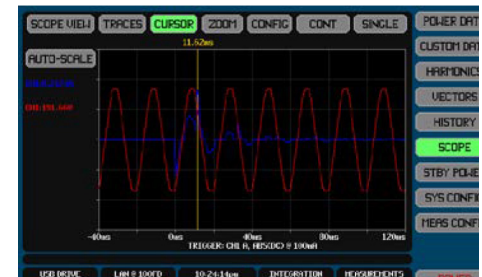


Standby Power

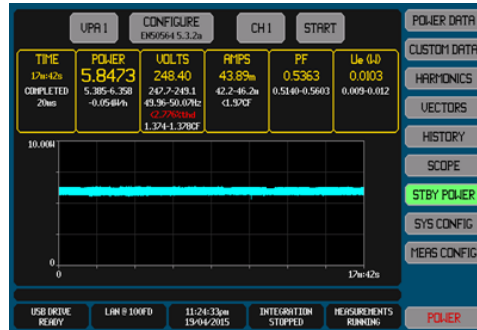

INDUSTRIES SERVED


- Automated Production Testing • Ballast Testing • Consumer Products • Engineering Labs
- Instrument Maintenance & Repair • Peak Power & Consumption Measurements
- Light Output Verification • Product Compliance Testing • Test Labs

25
Years Industry
EXPERTISE

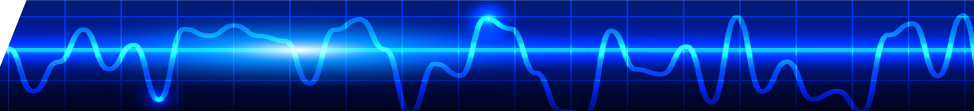

XT2640

Precision Multi-Channel Power Analyzer

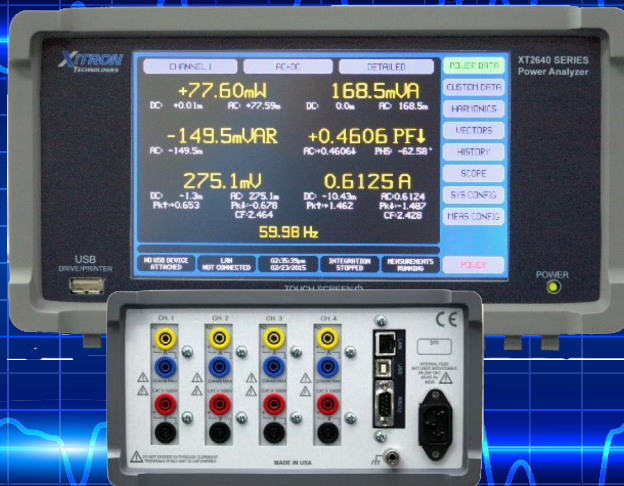

**Test Like You
MEAN IT**

XT2640 channels may be configured in any one (or none) of the 3 virtual power analyzers. Each virtual power analyzer may be configured for up to all channels installed. Each VPA is independently configured for multi-channel wiring configuration, signal filtering, default measurement coupling, display results smoothing and significant digits, VA/VAR combine method, and efficiency grouping. VPAs may optionally be configured to be synchronized to each other.

XVIEW Software



While all Vitrek precision test equipment is designed to be used in a completely stand-alone manner, there are times when external tools can aid or enhance the operation of an instrument.

XView software tools and drivers are designed to help easily configure an instrument from a single screen, or are used to view a complete set of measurements in a single screen.

Other XView tools are designed for data collection where results can be recorded in an Excel-compatible file for post-processing, insertion into reports, or simply for archival purposes.

Ordering Information

| | | | |
|--------------------|---|----------------------|--|
| 822-XT2640AD (STD) | Basic Power Analyzer chassis, with 26A element, 220-260ksps, 24bit effective resolution, 0.025% rdg (V) (1 thru 4 Channel) | 892-26GPIB | IEEE-488/GPIB interface option (note: this replaces the USB and Ethernet interfaces) |
| 822-XT2640WD | Basic Power Analyzer chassis, with 26W element, 850-1100ksps, 24bit effective resolution, 0.2% rdg, (V) (1 thru 4 Channel) | 892-26xx OPT D (STD) | Standard current option, 2 ranges, 20Arms max |
| 822-XT2640SD | Basic Power Analyzer chassis, with 26S element, 220-260ksps, 22bit effective resolution, 0.1% rdg (V) (1 thru 4 Channel) | 892-26xx OPT H | High current option, 1 range, 35Arms max |
| 822-XT2640ED | Basic Power Analyzer chassis, with 26E element, 220-260ksps, 24bit effective resolution, 0.05% rdg, (V), IEC 61000-3-2 compliant harmonic measurement. (1 thru 4 Channel) | 892-26xx OPT X | External current option, 2 ranges, 15Vrms input max |
| 822-26AD (Card) | Power Analyzer A Element, 220-260ksps, 24bit effective resolution, 0.025% rdg (V) | 892-26xx OPT H500 | Allows up to 500 harmonics on all W cards in a unit |
| 822-26WD (Card) | Power Analyzer W Element, 850-1100ksps, 24bit effective resolution, 0.2% rdg, (V) | 892-26xx OPT MU | Multi Unit Option |
| 822-26SD (Card) | Power Analyzer S Element, 220-260ksps, 22bit effective resolution, 0.1% rdg (V) | 892-26xx OPT EN | Built-in EN61000 compliance firmware for all cards in a unit |
| 822-26ED (Card) | Power Analyzer E Element, 220-260ksps, 24bit effective resolution, 0.05% rdg, (V) | 892-HC-7 | Hard carrying case, pelican-type |
| | | 892-RM-7 | 4U (7in height) rackmount kit for 4 channel units |
| | | 892-280x Cable IEC | Connection Cable |
| | | LS-XT2640 | Lead Set |



Vitrek
12169 Kirkham Road
Poway, CA 92164
(858) 689-2755
info@vitrek.com
www.vitrek.com



Please visit www.vitrek.com for ordering information.



1 DIMENSIONAL, ENVIRONMENTAL AND POWER SUPPLY SPECIFICATIONS

1.1 DIMENSIONAL

Nominal Dimensions 137mmH x 248mmW x 284mmD (5.4" x 9.75" x 11.2") with feet not extended
 Nominal Weight 3.2kg (7lb) net, 5kg (11lb) shipping

1.2 ENVIRONMENTAL

Storage Environment -20 to 75C (-4 to 167F) (non-condensing)
 Operating Environment 0 to 40C (32 to 104F), <85% RH (non-condensing), Pollution
 Operating Altitude Degree 2 0 to 2000m (6560ft) ASL

1.3 POWER SUPPLY

Line Power Installation Category II; 85-264Vrms, 45 to 65Hz, 40VA max. Internally fused with a non-user serviceable fuse

2 ELECTRICAL CHANNEL INPUT AND ACCURACY SPECIFICATIONS

Note:

All percentages are % of reading unless otherwise described.

2.1 INPUT ISOLATION SPECIFICATIONS

Valid for any V terminal to XT2640 chassis ground; any A terminal to XT2640 chassis ground; and between any V and any A terminal.


Impedance >1GΩ || <30pF
 Max. Voltage 4500V_{PK} max without damage
 2500V_{RMS} max for <1s without damage
 1000V_{RMS} max continuous rated working voltage (CAT I/
 II) 600V_{RMS} max continuous rated working voltage (CAT
 III) 300V_{RMS} max continuous rated working voltage (CAT
 I/A)

2.2 VOLTAGE MEASUREMENT SPECIFICATIONS

The specifications for voltage are independent of the current input option installed in the respective channel.





2.2.1 VOLTAGE INPUT CAPABILITY AND CHARACTERISTICS


| Specification | | S Channel Type | A Channel Type | L Channel Type | W Channel Type |
|--------------------------|------------|--|----------------|--|---|
| No Damage Voltage Range | <1ms | <3000V _{RMS} and V _{PK} | | <500V _{RMS} and 3000V _{PK} | <3000V _{RMS} and V _{PK} |
| | <100ms | <2000V _{RMS} | | <300V _{RMS} | <1500V _{RMS} |
| | <5s | <1500V _{RMS} | | <250V _{RMS} | <1000V _{RMS} |
| | Continuous | <1000V _{RMS} | | <160V _{RMS} | <650V _{RMS} |
| | XT2640 | As above | | | |
| Measurable Voltage Range | Unpowered | <1803V _{RMS} and V _{PK} | | <182.3V _{RMS} and V _{PK} | <1803V _{RMS} and V _{PK} |
| Specified Voltage Range | | <1000V _{RMS} and <1750V _{PK} | | <160V _{RMS} and <175V _{PK} | <650V _{RMS} and <1750V _{PK} |
| Impedance Burden | | 1.201MΩ ± 0.25% | | 121kΩ ± 0.25% | 399.5kΩ ± 0.25% |
| 3dB Bandwidth (typical) | | 900kHz | | | 3MHz |

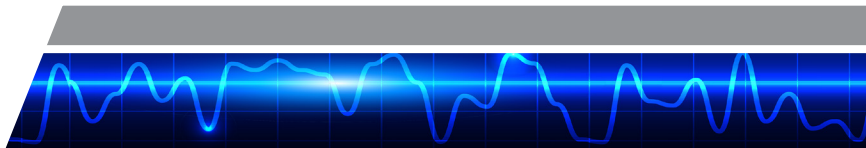

2.2.2 VOLTAGE MEASUREMENT ACCURACY

The charts below show guaranteed maximum voltage errors for DC, MAINS, AVIONICS, and 50kHz throughout a 1V to 1000V range of applied voltages expressed as % of reading and are valid within $\pm 5^{\circ}\text{C}$ of the calibration temperature (add 0.005% per C beyond this) and where no significant common-mode is present. Following the charts is a table which can be used to calculate the guaranteed accuracies for applications other than shown in the charts and also for the computation of numerical errors.

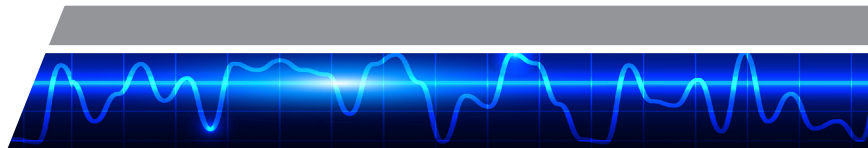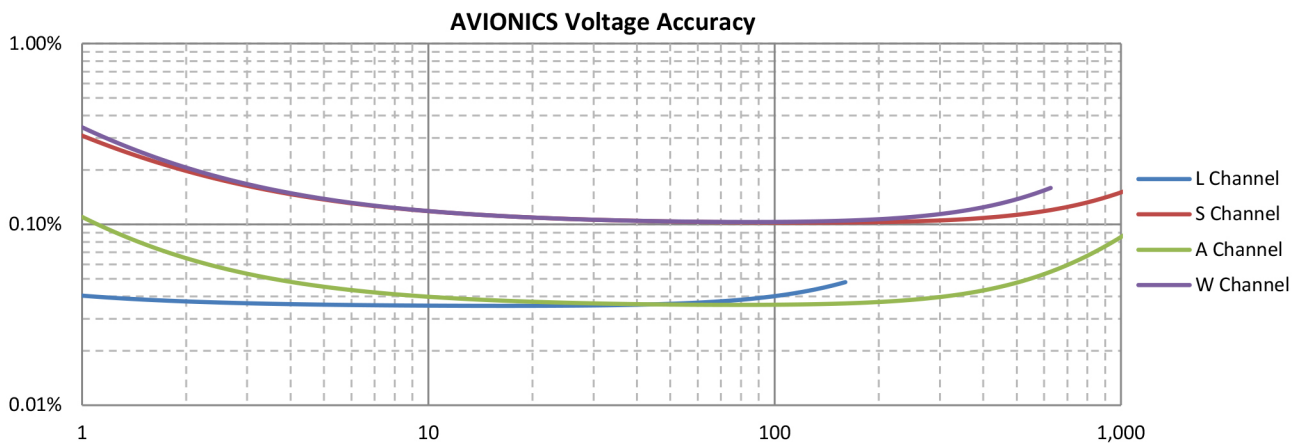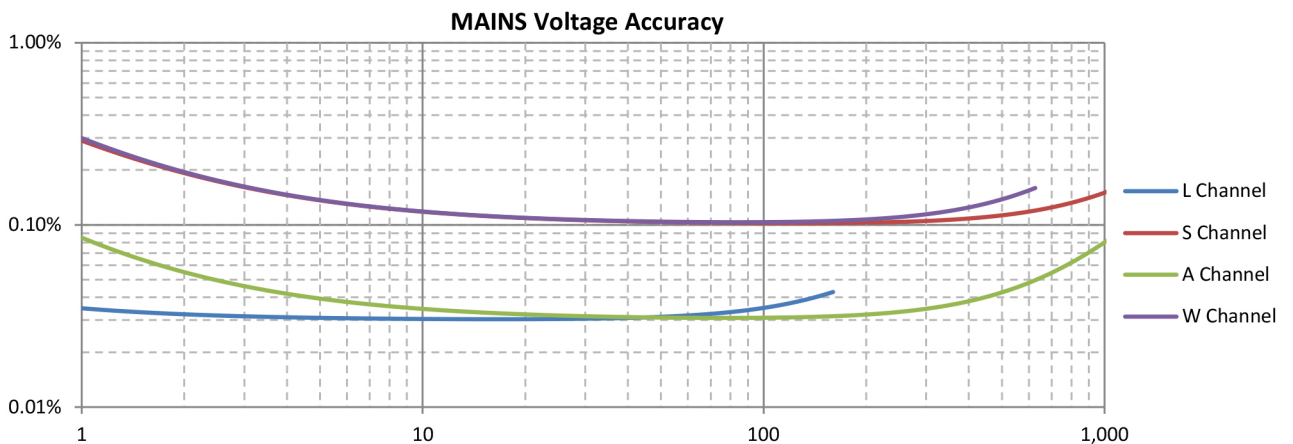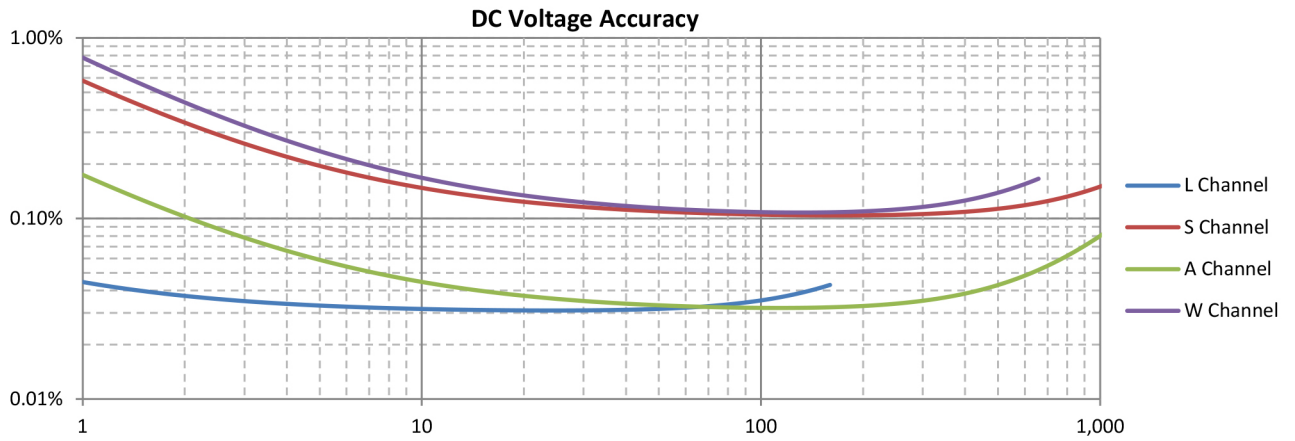


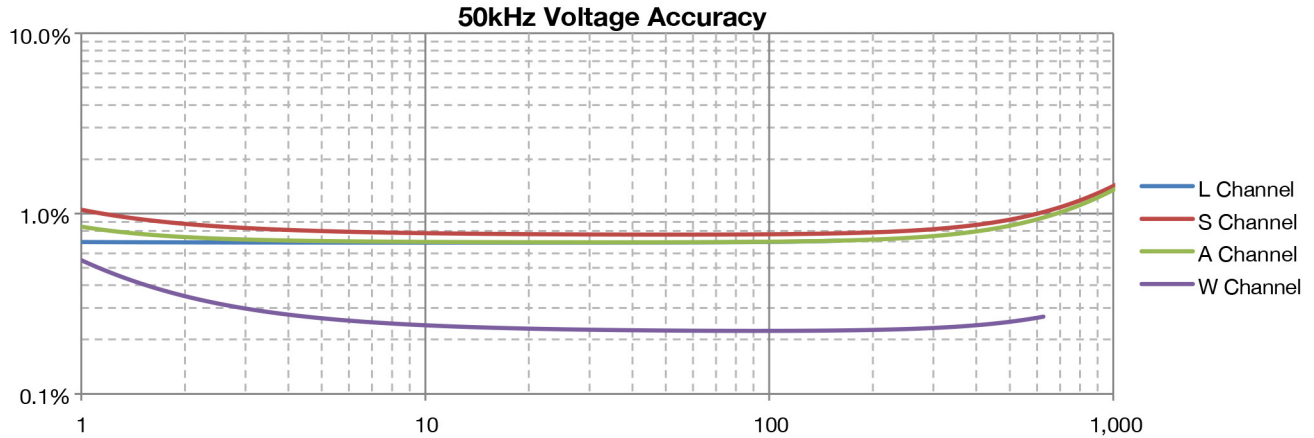

2.2.2.1 PRIMARY VOLTAGE MEASUREMENT ACCURACY TABLE

Add relevant errors from the table below for the maximum error in primary voltage measurements (e.g. DC, AC, AC+DC, Rectified, Peak, Valley, Peak-Valley).

| MAXIMUM SCALING ERRORS | | | | |
|--|---|------------------------|--|---------------------------------------|
| Apply to all results as shown below as a percentage of the reading If signal contains significant levels at multiple frequencies, apply to each level & frequency | | | | |
| Specification | S Channel Type | A Channel Type | L Channel Type | W Channel Type |
| Base Scaling Error Apply to all results | 0.1% | 0.03% | | 0.1% (0.2% if 2ms LF/PERIOD) |
| Frequency Dependent Scaling Error Apply to all results other than DC or MAINS | AVIONICS | None | 0.005% | None |
| | LF or VLF | | 0.01% | 0.05% |
| | <10kHz | | F*0.005% | F*0.002% |
| | 10k-40kHz | | 0.05%+(F-10)*0.012% | |
| | 40k-100kHz | | 0.41%+(F-40)*0.025% | 0.08%+(F-40)*0.004% |
| | 100k-1MHz | | Typically (F/1000)*100% | 0.32%+(F-100)*0.013% |
| | >1MHz | | Not specified | Typically (F/3500)*100% |
| Self-Heating Scaling Error Apply to all results (only significant at higher voltages) 1 minute nominal time constant | $0.05% \cdot (V_{AC+DC}/1000)^2$ | | $0.5% \cdot (V_{AC+DC}/1000)^2$ | $0.15% \cdot (V_{AC+DC}/1000)^2$ |
| Temperature Scaling Error Apply to all results if outside of $\pm 5C$ from calibration temperature | 0.005% per C outside of $\pm 5C$ from calibration temperature | | | |
| Bandwidth Limit Scaling Error Apply if using USER bandwidth setting | $10% \cdot (F/F_{BW})^2$, unspecified for $F > 0.3 \cdot F_{BW}$ | | | |
| MAXIMUM FLOOR ERRORS | | | | |
| Apply to all results as shown below in Volts (generally only significant at low input) | | | | |
| Specification | S Channel Type | A Channel Type | L Channel Type | W Channel Type |
| Base Floor Error Apply to all results | 1.8mV | 450 μ V | 45 μ V | 1.8mV |
| DC Floor Error Apply to DC and RECTIFIED results Apply to AC+DC results after multiplying by V_{DC}/V_{AC+DC} | 3mV | 1mV | 100 μ V | 5mV |
| AC Floor Error Apply to AC, AC+DC, and RECTIFIED results | MAINS, LF, VLF & $F_{BW} \leq 10kHz$ | 100 μ V/ V_{RDG} | 100 μ V/ V_{RDG} | 4 μ V/ V_{RDG} |
| | AVIONICS & $F_{BW} \leq 50kHz$ | 300 μ V/ V_{RDG} | 300 μ V/ V_{RDG} | 8 μ V/ V_{RDG} |
| | Otherwise | 1.1mV/ V_{RDG} | 1.1mV/ V_{RDG} | 11 μ V/ V_{RDG} |
| Peak Floor Error Apply to PK, VLY and PK-VLY results | MAINS, LF, VLF & $F_{BW} \leq 10kHz$ | 40mV | 40mV | 8mV |
| | AVIONICS & $F_{BW} \leq 50kHz$ | 75mV | 75mV | 11mV |
| | Otherwise | 125mV | 125mV | 17mV |
| Common Mode Error Apply to AC, AC+DC, and RECTIFIED results Apply using voltage on V LO terminal relative to chassis ground. Error has 90° phase shift to common-mode voltage | 1 μ V per V.Hz (11.5mV@230V/50Hz) | | 100nV per V.Hz (1.15mV@230V/50Hz) | 700nV per V.Hz (8.05mV@230V/50Hz) |
| Adjacent Channel Error Apply to AC, AC+DC, and RECTIFIED results Apply using adjacent channel A LO or V LO terminal voltage relative to chassis ground. Error has 90° phase shift to adjacent channel voltage | 300nV per V.Hz (3.45mV@230V/50Hz) | | 30nV per V.Hz (345 μ V@230V/50Hz) | 210nV per V.Hz (2.415mV@230V/50Hz) |

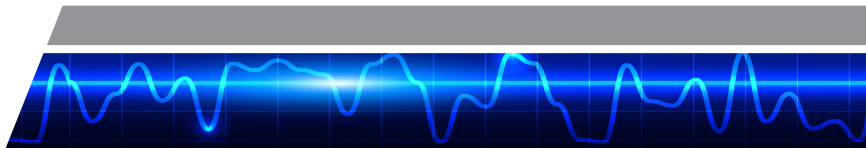

2.2.2.2 SECONDARY VOLTAGE MEASUREMENT ACCURACY TABLE

| Specification | S Channel Type | A Channel Type | L Channel Type | W Channel Type |
|---|---|----------------------|--------------------------|------------------------|
| Crest Factor Error | (Total Floor Error from preceding table for PK results) / V_{AC} | | | |
| Form Factor Error | (Total Floor Error from preceding table for AC+DC results) / $V_{RECTIFIED}$ | | | |
| Inter-Channel Error For 120° between equal amplitudes | (Relevant Voltage Errors from preceding table at the inter-channel voltage) + 0.0015%*F | | | |
| Harmonic or Spectrum Error | AC Voltage Errors from preceding table at V and F of the harmonic or spectrum point + (H/N) ² *0.3% of reading + (if not fundamental) from below using the frequency of the harmonic or spectrum point | | | |
| | <10kHz | 0.01% of V_{AC+DC} | 0.006% of V_{AC+DC} | 0.015% of V_{AC+DC} |
| | 10k-115kHz | | 0.05% of V_{AC+DC} | 0.03% of V_{AC+DC} |
| | 115k-435kHz | | Not Available | 0.08% of V_{AC+DC} |
| Inter-Channel Fundamental Phase Error | 0.02°+0.15°*F | | | 0.01°+0.07°*F |
| Harmonic-Fundamental Phase Error (typical, BANDWIDTH configured as UNFILTERED) | 0.02°+0.1°*F+0.001°*H | | | 0.02°+0.03°*F+0.001°*H |
| %THD Error Errors shown are all expressed in % THD units | (0.005+0.000025*N)*%THD+0.00005*N ² /N + from below using the frequency of highest included harmonic | | | |
| | <10kHz | 0.025+1.25/ V_{AC} | 0.015+1/ V_{AC} | 0.015+0.2/ V_{AC} |
| | 10k-115kHz | | $V_{AC} 0.15+3.5/V_{AC}$ | 0.15 |
| | 115k-435kHz | +0.35/ V_{AC} | Not Available | 0.15+4/ V_{AC} |



2.3 CURRENT MEASUREMENT SPECIFICATIONS





2.3.1 CURRENT INPUT CAPABILITY AND CHARACTERISTICS






| Specification | Channel Type | Option H | Option D HI Range or Auto-Range when on HI Range | Option D LO Range or Auto-Range when on LO Range | Option X HI Range | Option X LO Range |
|---------------------------------|------------------|---|--|--|---|--|
| No Damage Current Range | <8ms | All | <200A _{RMS} and <300A _{PK} | <150A _{RMS} and <250A _{PK} | <60A _{RMS} and <150A _{PK} | <200V _{RMS} and <300V _{PK} |
| | <40ms | All | <75A _{RMS} | <50A _{RMS} | <40A _{RMS} | <50V _{RMS} |
| | <1s | All | <50A _{RMS} | <30A _{RMS} | <5A _{RMS} | <30V _{RMS} |
| | Continuous | All | <30A _{RMS} | <20A _{RMS} | <2A _{RMS} | <25V _{RMS} and V _{PK} |
| | XT2640 Unpowered | All | As Above | <2A _{RMS} and <150A _{PK} | <25V _{RMS} and <300V _{PK} | <25V _{RMS} and <300V _{PK} |
| Measurable Current Range | All | <225A _{RMS} and A _{PK} | <150A _{RMS} and A _{PK} | <1.02A _{RMS} and A _{PK} | <23.1V _{RMS} and V _{PK} | <0.576V _{RMS} and V _{PK} |
| Specified Current Range | All | <30A _{RMS} and <200A _{PK} | <20A _{RMS} and <140A _{PK} | <1A _{RMS} and A _{PK} | <15V _{RMS} and <20V _{PK} | <0.55V _{RMS} and V _{PK} |
| Impedance Burden | All | 2.5mΩ to 7mΩ | 4mΩ to 12mΩ | 0.562Ω ± 0.75% | 20.5kΩ ± 0.25% | 10.25kΩ ± 0.25% |
| 3dB Bandwidth (typical) | S, A or L | 1.25MHz | | | | |
| | W | 5MHz | | | 3MHz | |

2.3.2.CURRENT MEASUREMENT ACCURACY

The charts below show guaranteed maximum current errors for DC, MAINS, AVIONICS, and 50kHz throughout a 100μA to 30A range of applied currents expressed as % of reading and are valid within ±5C of the calibration temperature (add 0.005% per C beyond this) and where no significant common-mode is present. Following the charts is a table which can be used to calculate

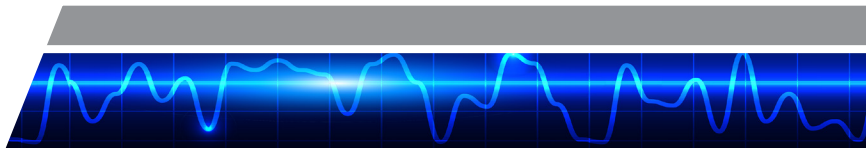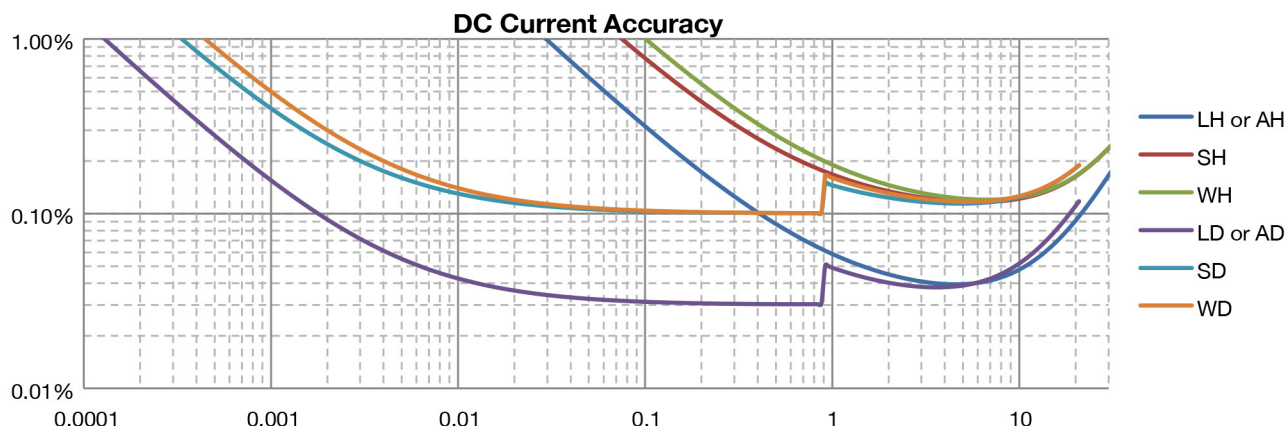

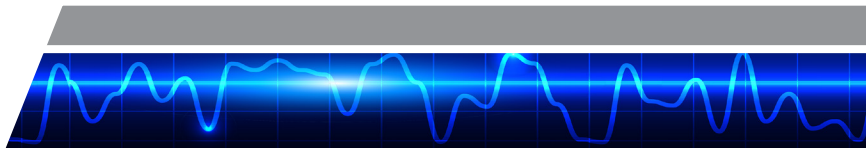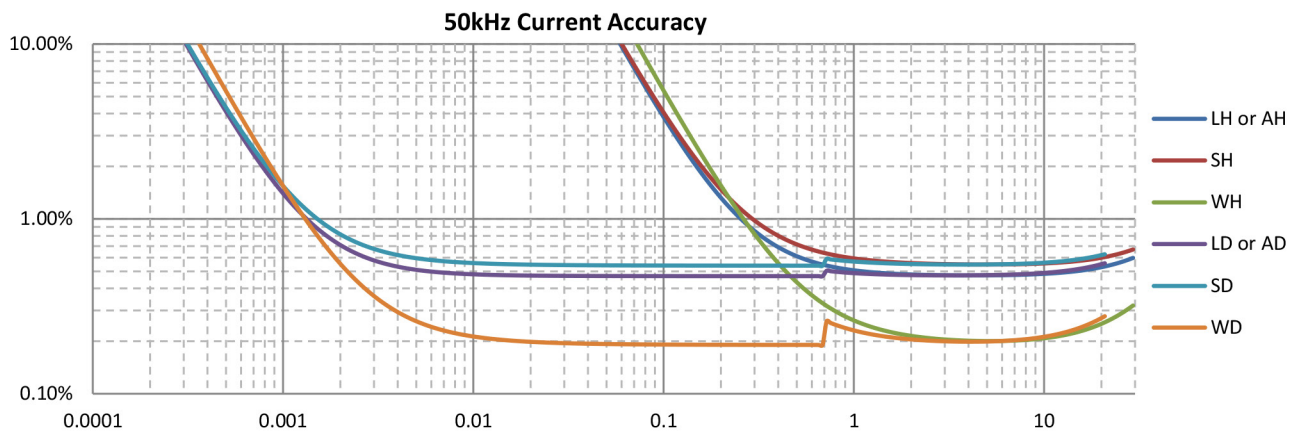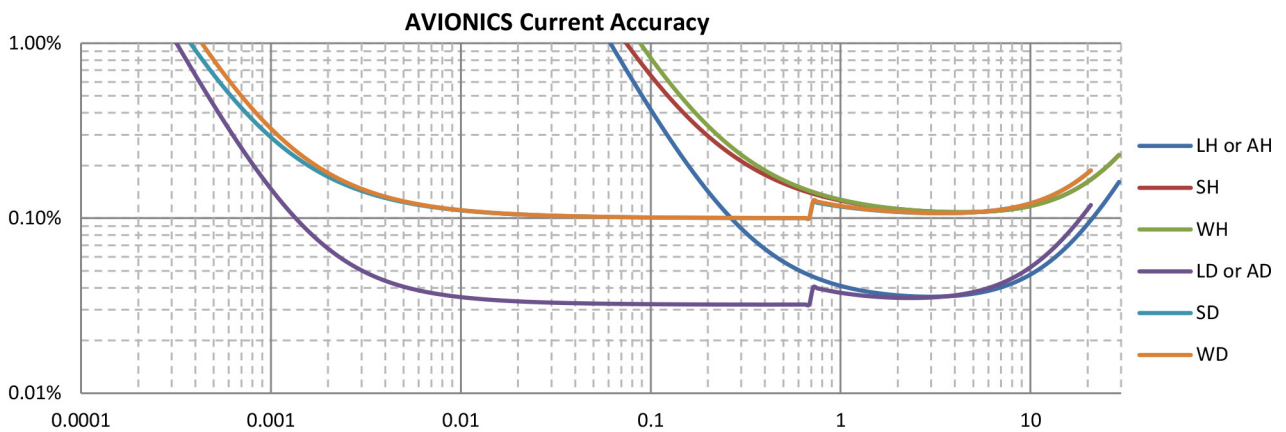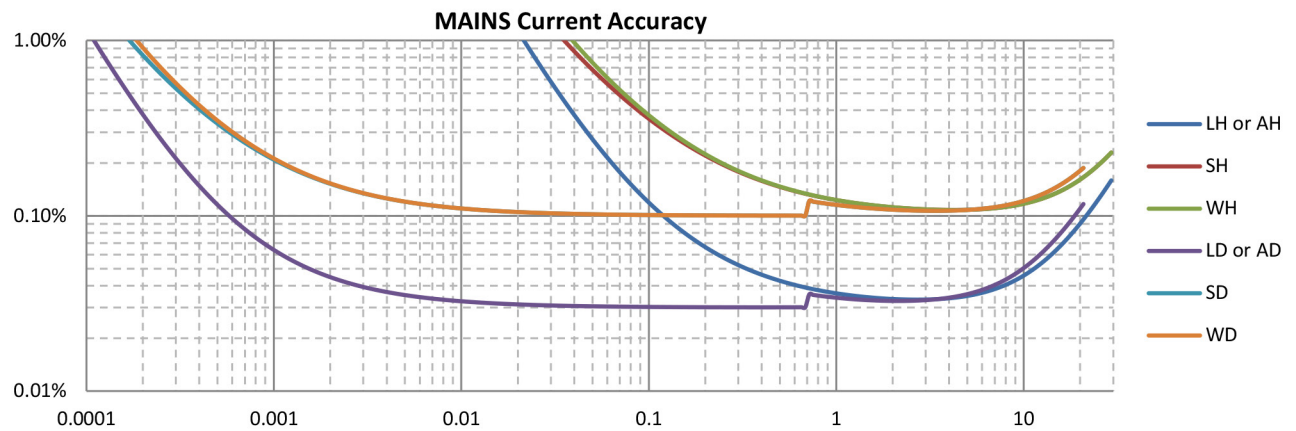


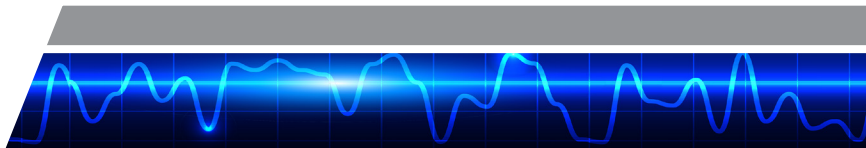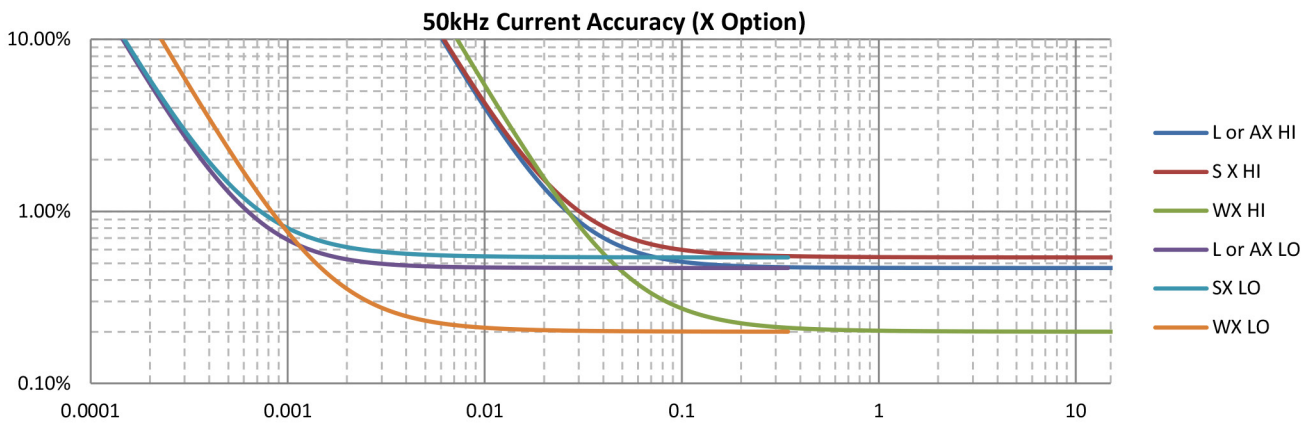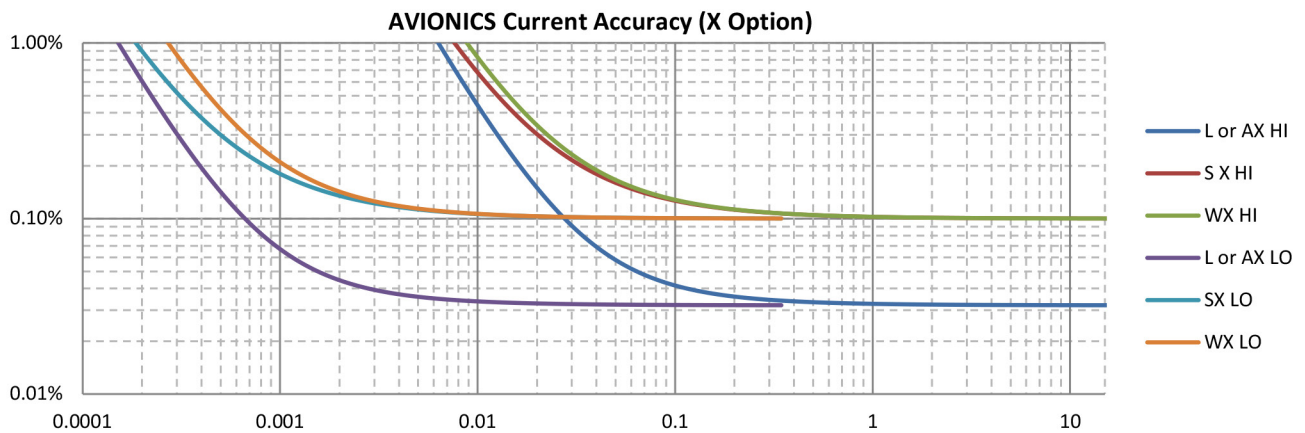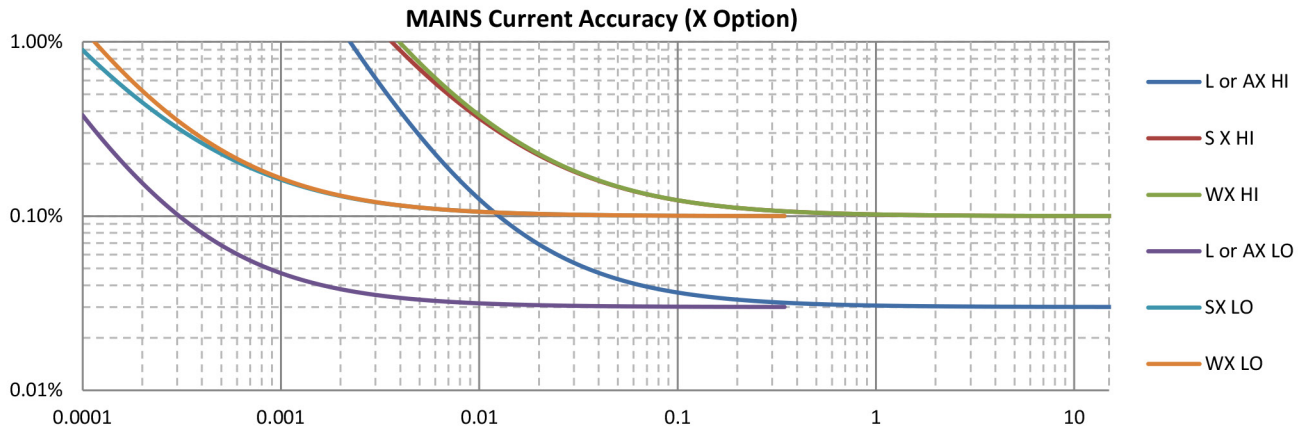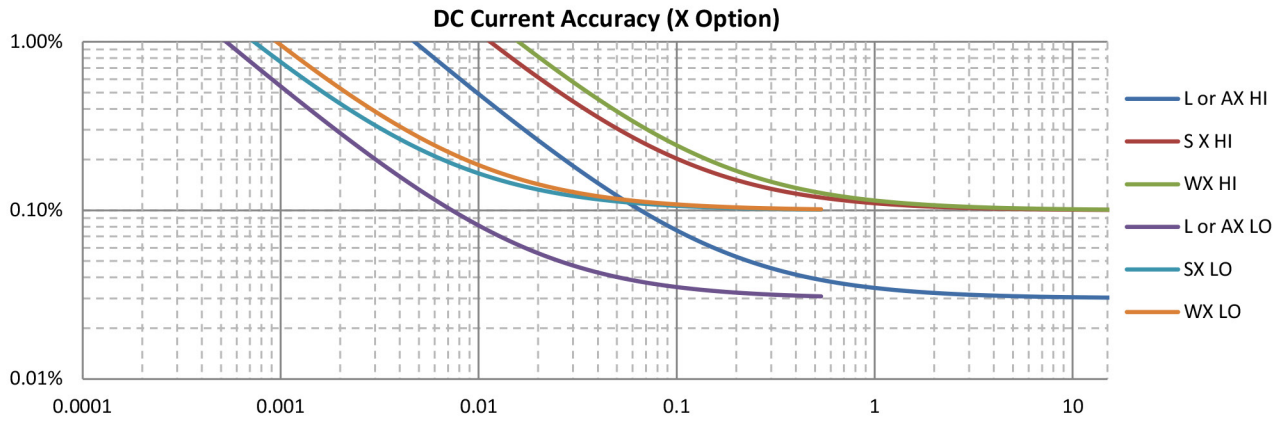

2.3.2.1 PRIMARY CURRENT MEASUREMENT ACCURACY TABLE

Add relevant errors from the table below for the maximum error in primary current measurements (e.g. DC, AC, AC+DC, Rectified, Peak, Valley, Peak-Valley).

| MAXIMUM SCALING ERRORS | | | | | | | |
|---|---|--|---|-------------------------------------|--------------------------------------|---|-------------------------|
| Apply to all results as shown below as a percentage of the reading If signal contains significant levels at multiple frequencies, apply to each level & | | | | | | | |
| Specification | Channel Type | Option H | Option D HI Range | Option D LO Range | Option X HI Range | Option X LO Range | |
| Base Scaling Error Apply to all results | A or L | | | | | 0.03% | |
| | S or W | | | | | 0.1% (0.2% if 2ms LF/PERIOD) | |
| Frequency Dependent Scaling Error Apply to all results other than DC or MAINS | LF or VLF | S, A or L | | | | 0.01% | |
| | | W | | | | 0.05% | |
| | AVIONICS | A or L | | | | | 0.002% |
| | | S or W | | | | | None |
| | <10kHz | S, A or L | | | | | F*0.003% |
| | | W | | | | | F*0.0015% |
| | 10k-40kHz | S, A or L | | | | | 0.03%+(F-10)*0.007% |
| | | W | | | | | F*0.0015% |
| | 40k-100kHz | S, A or L | | | | | 0.24%+(F-40)*0.02% |
| | | W | | 0.06%+(F-40)*0.003% | | | 0.06%+(F-40)*0.004% |
| 100k-1MHz | S, A or L | | | | | Typically (F/1250) ² *100% | |
| | W | | 0.24%+(F-100)*0.012% | | | 0.3%+(F-100)*0.015% | |
| >1MHz | W | | Typically (F/5000) ² *100% | | | Typically (F/3000) ² *100% | |
| Self-Heating Scaling Error Apply to all results (only significant at higher currents) 3 minute nominal time constant | All | 0.00015%*A _{AC+DC} ² | 0.0002%*A _{AC+DC} ² | | | None | |
| Temperature Scaling Error Apply to all results if outside of ±5C from calibration temperature | All | | | | | 0.005% per C outside of ±5C from calibration temperature | |
| Bandwidth Limit Scaling Error Apply if using USER bandwidth setting | All | | | | | 10%*(F/F _{BW}) ² , unspecified above 0.3*F _{BW} | |
| MAXIMUM FLOOR ERRORS | | | | | | | |
| Apply to all results as shown below in Amps (generally only significant at low input) | | | | | | | |
| Specification | Channel Type | Option H | Option D HI Range | Option D LO Range | Option X HI Range | Option X LO Range | |
| Base Floor Error Apply to all results | A or L | 56µA | 38µA | 250nA | 6µV | 150nV | |
| | S or W | 225µA | 150µA | 1µA | 23µV | 600nV | |
| DC Floor Error Apply to DC and RECTIFIED results Apply to AC+DC results after multiplying by A _{DC} /A _{AC+DC} | A or L | 0.23mA | 0.15mA | 1µA | 40µV | 5µV | |
| | S | 0.45mA | 0.3mA | 2µA | 80µV | 6µV | |
| | W | 0.68mA | 0.45mA | 3µA | 120µV | 8µV | |
| AC Floor Error Apply to AC, AC+DC, and RECTIFIED results | MAINS, LF, VLF & F _{BW} ≤10kHz | S, A or L | 3.3µA/AR _{DRG} | 1.5µA/AR _{DRG} | 90pA/AR _{DRG} | 35nV/AR _{DRG} | 20pV/AR _{DRG} |
| | | W | 5µA/AR _{DRG} | 2.5µA/AR _{DRG} | 125pA/AR _{DRG} | 50nV/AR _{DRG} | 50pV/AR _{DRG} |
| | AVIONICS & F _{BW} ≤50kHz | S, A or L | 33µA/AR _{DRG} | 15µA/AR _{DRG} | 0.9nA/AR _{DRG} | 350nV/AR _{DRG} | 200pV/AR _{DRG} |
| | | W | 50µA/AR _{DRG} | 25µA/AR _{DRG} | 1.25nA/AR _{DRG} | 500nV/AR _{DRG} | 500pV/AR _{DRG} |
| | Otherwise | S, A or L | 330µA/AR _{DRG} | 150µA/AR _{DRG} | 9nA/AR _{DRG} | 3.5µV/AR _{DRG} | 2nV/AR _{DRG} |
| W | 500µA/AR _{DRG} | 250µA/AR _{DRG} | 12.5nA/AR _{DRG} | 5µV/AR _{DRG} | 5nV/AR _{DRG} | | |
| Peak Floor Error Apply to PK, VLY and PK-VLY results | MAINS, LF, VLF & F _{BW} ≤10kHz | S, A or L | 8mA | 5mA | 40µA | 0.75mV | 25µV |
| | | W | 10mA | 6.5mA | 50µA | 0.9mV | 30µV |
| | AVIONICS & F _{BW} ≤50kHz | S, A or L | 25mA | 17mA | 125µA | 2.5mV | 65µV |
| | | W | 30mA | 20mA | 150µA | 3mV | 80µV |
| | Otherwise | S, A or L | 75mA | 50mA | 400µA | 7.5mV | 200µV |
| W | 90mA | 60mA | 500µA | 10mV | 250µV | | |
| Common Mode Error Apply to all results Apply using voltage on A LO terminal relative to chassis ground. Error has 90° phase shift to common-mode voltage | All | 500pA per V.Hz (5.75µA@230V/50Hz) | 400pA per V.Hz (4.6µA@230V/50Hz) | 20pA per V.Hz (0.23µA@230V/50Hz) | 15nV per V.Hz (0.172mV@230V/50Hz) | 0.5nV per V.Hz (5.75µV@230V/50Hz) | |
| Adjacent Channel Error Apply to all results Apply using adjacent channel A LO or V LO terminal voltage relative to chassis ground. Error has 90° phase shift to adjacent channel voltage | All | 150pA per V.Hz (1.725µA@230V/50Hz) | 120pA per V.Hz (1.38µA@230V/50Hz) | 7pA per V.Hz (80.5nA@230V/50Hz) | 7nV per V.Hz (80.5µV@230V/50Hz) | 0.2nV per V.Hz (2.3µV@230V/50Hz) | |


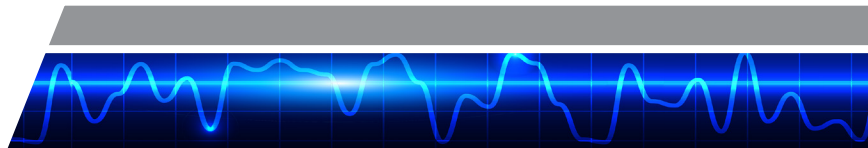


2.3.2.2 SECONDARY CURRENT MEASUREMENT ACCURACY TABLE


| Specification | Channel Type | Option H | Option D HI Range | Option D LO Range | Option X HI Range | Option X LO Range | |
|---|-----------------------------|---|---|----------------------------|-----------------------------|-----------------------------|------------------------------|
| Crest Factor Error | All | (Total Current Floor Error from preceding table for PK results) / A _{AC} | | | | | |
| Form Factor Error | All | (Total Current Floor Error from preceding table for AC+DC results) / A _{RECTIFIED} | | | | | |
| Multi-Channel Error For similar current level and phase in each phase. | A _N (2ø3w) | All | Relevant Current Errors from preceding table for A _{øA} + Relevant Current Errors from preceding table for A _{øB} + 0.0005% of (A _{øA} + A _{øB})*F | | | | |
| | A _{øC} (3ø3w 2ch) | All | Relevant Current Errors from preceding table for A _{øA} + Relevant Current Errors from preceding table for A _{øB} + 0.0015% of (A _{øA} + A _{øB})*F | | | | |
| | A _N (3ø4w) | All | Relevant Current Errors from preceding table for A _{øA} + Relevant Current Errors from preceding table for A _{øB} + Relevant Current Errors from preceding table for A _{øC} + 0.0015% of (A _{øA} + A _{øB} + A _{øC})*F | | | | |
| Harmonic or Spectrum Error | All | AC Current Errors from preceding table at A and F of the harmonic or spectrum point + (H/N) ² *0.3% of reading + (if not fundamental) from below using the frequency of the harmonic or spectrum point | | | | | |
| | <10kHz | A or L | 0.006% of A _{AC+DC} | | | | |
| | 10k-115kHz | | 0.05% of A _{AC+DC} | | | | |
| | <10kHz | S | 0.01% of A _{AC+DC} | | | | |
| | 10k-115kHz | | 0.05% of A _{AC+DC} | | | | |
| | <10kHz | W | 0.015% of A _{AC+DC} | | | | |
| 10k-115kHz | 0.03% of A _{AC+DC} | | | | | | |
| 115k-435kHz | 0.08% of A _{AC+DC} | | | | | | |
| Current-Voltage Fundamental Phase Error | S, A or L | 0.005° + 0.015°*F | | | | | |
| | W | 0.005° + 0.007°*F | | | | | |
| Harmonic-Fundamental Phase Error (typical, BANDWIDTH configured as UNFILTERED) | S, A or L | 0.02°+0.1°*F+0.001°*H | | | | | |
| | W | 0.02°+0.03°*F+0.001°*H | | | | | |
| %THD Error Errors shown are all expressed in %THD units. | All | (0.005+0.000025*N)*%THD+0.00005*N*/N + from below using the frequency of highest included harmonic | | | | | |
| | <10kHz | A or L | 0.015+0.2/A _{AC} | 0.015+0.15/A _{AC} | 0.015+0.001/A _{AC} | 0.015+0.025/A _{AC} | 0.015+0.0006/A _{AC} |
| | 10k-115kHz | | 0.15+2/A _{AC} | 0.15+1.5/A _{AC} | 0.15+0.01/A _{AC} | 0.15+0.25/A _{AC} | 0.15+0.006/A _{AC} |
| | <10kHz | S | 0.025+0.2/A _{AC} | 0.025+0.15/A _{AC} | 0.025+0.001/A _{AC} | 0.025+0.025/A _{AC} | 0.025+0.0006/A _{AC} |
| | 10k-115kHz | | 0.15+2/A _{AC} | 0.15+1.5/A _{AC} | 0.15+0.01/A _{AC} | 0.15+0.25/A _{AC} | 0.15+0.006/A _{AC} |
| | <10kHz | W | 0.03+0.25/A _{AC} | 0.03+0.18/A _{AC} | 0.03+0.0012/A _{AC} | 0.03+0.03/A _{AC} | 0.03+0.001/A _{AC} |
| | 10k-115kHz | | 0.06+2.5/A _{AC} | 0.06+1.8/A _{AC} | 0.06+0.012/A _{AC} | 0.06+0.3/A _{AC} | 0.06+0.01/A _{AC} |
| 115k-435kHz | 0.15+2.5/A _{AC} | | 0.15+1.8/A _{AC} | 0.15+0.012/A _{AC} | 0.15+0.3/A _{AC} | 0.15+0.01/A _{AC} | |

2.4 WATTS, VAR AND VA MEASUREMENT SPECIFICATIONS


The charts below show guaranteed maximum Watts errors for DC, MAINS, AVIONICS, and 50kHz from 100µW up to the highest available using a D option current measurement (H and X option current accuracies are similar within their respective range of currents and are not shown for clarity), expressed as % of Watts reading and are valid within ±5C of the calibration temperature (add 0.005% per C beyond this) and where no significant common-mode is present. Following the charts is a table which can be used to calculate the guaranteed accuracies for applications other than shown in the charts and also for the computation of

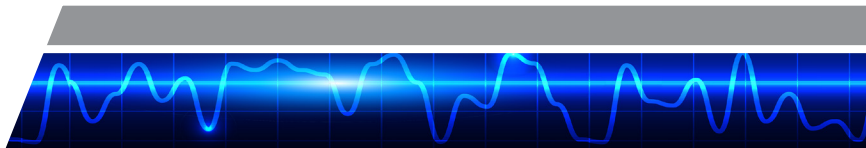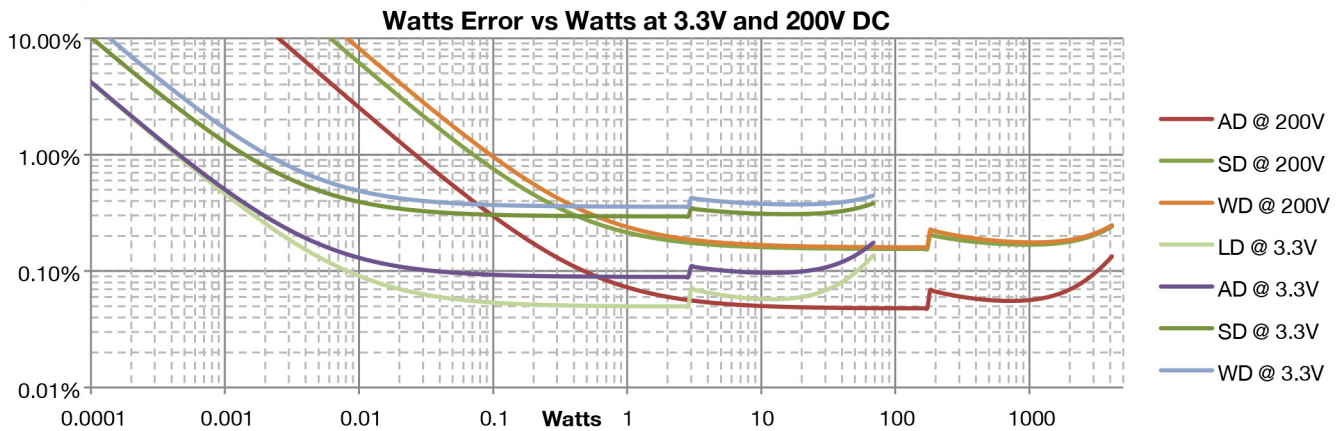



Watts Error vs Watts at 115V and 240V MAINS or AVIONICS (PF=1)

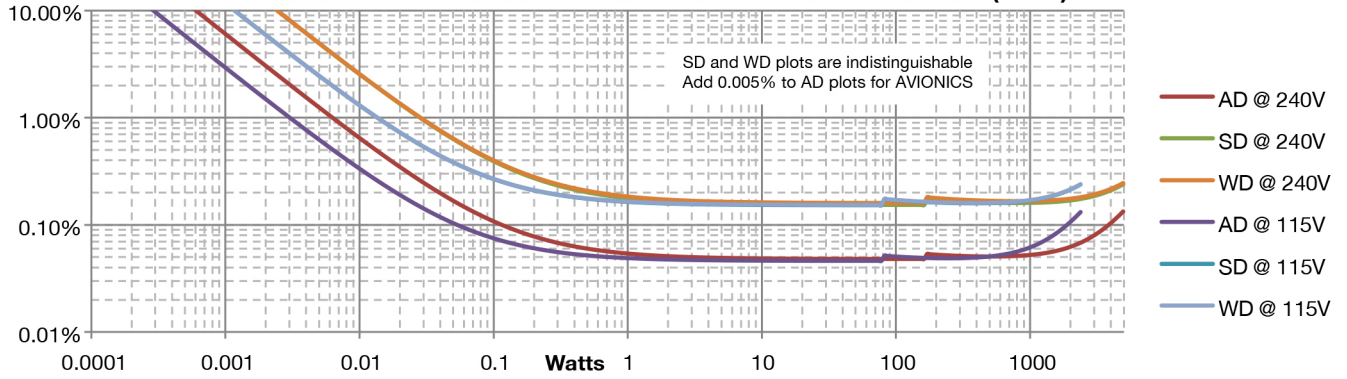

Watts Error vs Watts at 115V and 240V 50kHz (PF=1)

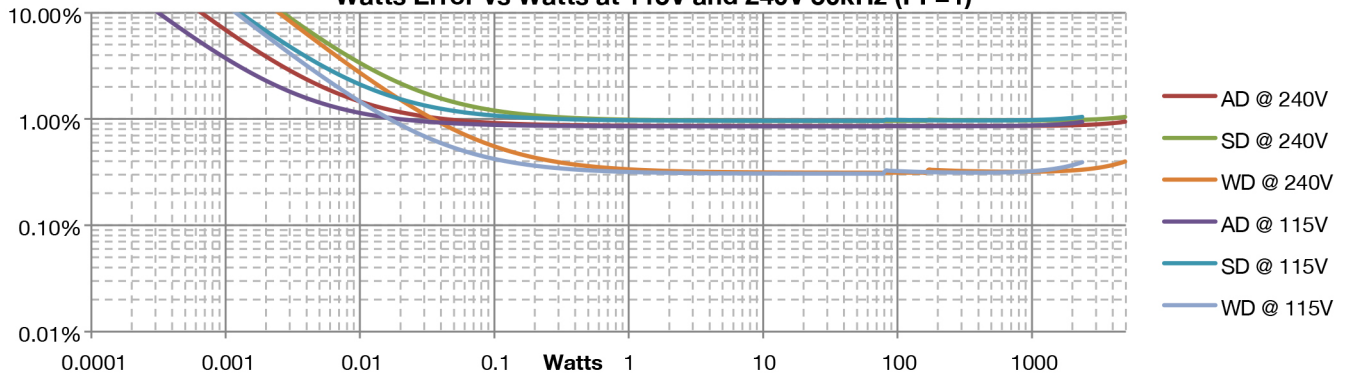

Watts Error vs Frequency @ 240V,1A (PF=0.3 and 1), D or H options

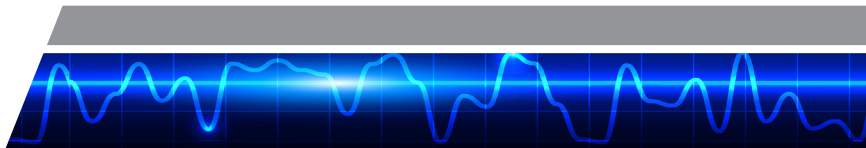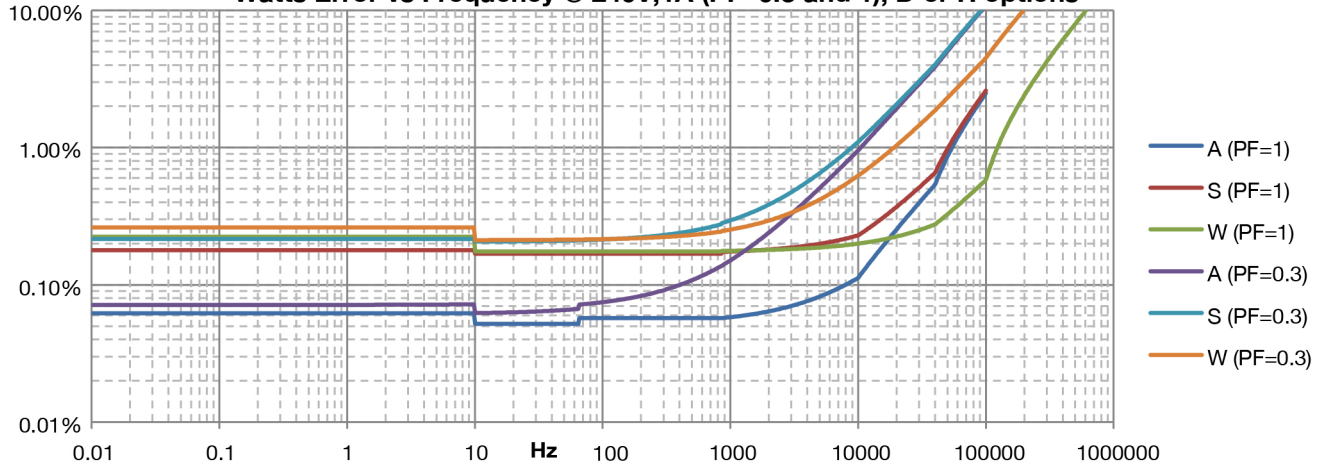


2.4.1 WATTS, VAR AND VA MEASUREMENT SPECIFICATIONS

2.4.1.1 PRIMARY WATTS, VAR AND VA MEASUREMENT ACCURACY TABLE

Add relevant errors from the table below for the maximum error in all Watts, VA and VAR measurements except harmonic Watts.

Note that by definition DC Watts and DC VA are identical, and DC VAR is zero

| MAXIMUM SCALING ERRORS | | | | | | | |
|--|--------------|---|---|---|--|--|---------------------|
| Apply to all results as shown below as a percentage of the reading | | | | | | | |
| If signal contains significant levels at multiple frequencies, apply to each level & | | | | | | | |
| Specification | Channel Type | Option H | Option D HI Range | Option D LO Range | Option X HI Range | Option X LO Range | |
| Base Scaling Error Apply to all results | A or L | | | | | 0.045% | |
| | S or W | | | | | 0.15% (0.3% if 2ms LF/PERIOD) | |
| Frequency Dependent Scaling Error Apply to AC component of all results other than DC or MAINS | LF or VLF | S, A or L | | | | 0.01% | |
| | | W | | | | 0.05% | |
| | AVIONICS | A or L | | | | | 0.005% |
| | | S or W | | | | | None |
| | <10kHz | S, A or L | | | | | F*0.006% |
| | | W | | | | | F*0.0025% |
| | 10k-40kHz | S, A or L | | | | | 0.06%+(F-10)*0.014% |
| | | W | | | | | F*0.0025% |
| | 40k-100kHz | S, A or L | | | | | 0.48%+(F-40)*0.032% |
| | | W | | 0.1%+(F-40)*0.005% | | | 0.1%+(F-40)*0.0055% |
| 100k-1MHz | S, A or L | | | | | Typically (F/1100) ² *150% | |
| | W | | 0.4%+(F-100)*0.018% | | | 0.43%+(F-100)*0.02% | |
| >1MHz | W | | Typically (F/5000) ² *150% | | | Typically (F/3000) ² *150% | |
| Self-Heating Scaling Error Apply as % of Power reading to all results using voltage and current Self-Heating Errors from previous tables | All | | | | | Add Voltage and Current Self-Heating Errors | |
| Temperature Scaling Error Apply to all results if outside of ±5C from calibration temperature | All | | | | | 0.005% per C outside of ±5C from calibration temperature | |
| Bandwidth Limit Scaling Error Apply to AC component of all results if using USER bandwidth setting | All | | | | | 20%*(F/F _{BW}) ² , unspecified above 0.3*F _{BW} | |
| MAXIMUM FLOOR ERRORS | | | | | | | |
| Apply to all results as shown below in Watts, VA or VAR as applicable (generally only significant at low input) | | | | | | | |
| Specification | Channel Type | Option H | Option D HI Range | Option D LO Range | Option X HI Range | Option X LO Range | |
| Base Floor Error Apply to all results | L | (V _{AC+DC} *56µA) + (A _{AC+DC} *45µV) | (V _{AC+DC} *38µA) + (A _{AC+DC} *45µV) | (V _{AC+DC} *250nA) + (A _{AC+DC} *45µV) | (V _{AC+DC} *6µA) + (A _{AC+DC} *45µV) | (V _{AC+DC} *0.15µA) + (A _{AC+DC} *45µV) | |
| | A | (V _{AC+DC} *56µA) + (A _{AC+DC} *450µV) | (V _{AC+DC} *38µA) + (A _{AC+DC} *450µV) | (V _{AC+DC} *250nA) + (A _{AC+DC} *450µV) | (V _{AC+DC} *6µA) + (A _{AC+DC} *450µV) | (V _{AC+DC} *0.15µA) + (A _{AC+DC} *450µV) | |
| | S or W | (V _{AC+DC} *225µA) + (A _{AC+DC} *1.8mV) | (V _{AC+DC} *150µA) + (A _{AC+DC} *1.8mV) | (V _{AC+DC} *1µA) + (A _{AC+DC} *1.8mV) | (V _{AC+DC} *23µA) + (A _{AC+DC} *1.8mV) | (V _{AC+DC} *0.6µA) + (A _{AC+DC} *1.8mV) | |
| DC Floor Error Apply to DC and AC+DC results using the Voltage and Current DC Floor Errors from previous tables | All | | | | | (V _{DC} *Current DC Floor Error) + (A _{DC} *Voltage DC Floor Error) + (Current DC Floor Error*Voltage DC Floor Error) | |
| AC Floor Error (VA and VAR only) Apply to AC and AC+DC VA & VAR results using voltage and current AC Floor Errors from previous tables | All | | | | | (V _{AC} *Current AC Floor Error) + (A _{AC} *Voltage AC Floor Error) | |
| Common Mode Error (VA and VAR only) Apply to AC component of VA and VAR results using the Voltage and Current Common Mode Errors from previous tables. | All | | | | | (V _{AC} *Current Common Mode Error) + (A _{AC} *Voltage Common Mode Error) | |
| Common Mode Error (Watts only) Apply to AC component of Watts results using the Voltage Common Mode Error from previous table | All | | | | | (A _{AC} *Voltage Common Mode Error) | |
| Adjacent Channel Error Apply to AC component of all results using the Voltage and Current Adjacent Channel Errors from previous tables | All | | | | | (V _{AC} *Current Adjacent Channel Error) + (A _{AC} *Voltage Adjacent Channel Error) | |
| Phase Floor Error (Watts only) Apply to AC and AC+DC Watts results | S, A or L | | | | | V _{FUND} *(P _{FUND} - cos(cos ⁻¹ (P _{FUND}) + 0.015°*F)) Alternately, as a worst case (at PF=0) this can expressed as F*0.028% of VA | |
| | W | | | | | V _{FUND} *(P _{FUND} - cos(cos ⁻¹ (P _{FUND}) + 0.007°*F)) Alternately, as a worst case (at PF=0) this can expressed as F*0.013% of VA | |

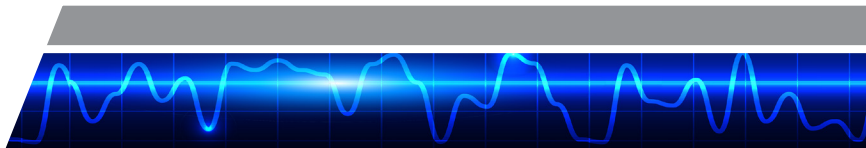

2.4.1.2 HARMONIC WATTS MEASUREMENT ACCURACY TABLE


| Specification | Channel Type | Option H | Option D HI Range | Option D LO Range | Option X HI Range | Option X LO Range |
|----------------------------------|------------------------------|---|-------------------------------|-------------------|-------------------|-------------------|
| Harmonic or Spectrum Watts Error | All | AC Watts Errors other than Phase Floor Error from preceding table at levels and F of the harmonic or spectrum point + (H/N) ² *0.5% of reading + from below using the frequency of the harmonic or spectrum point | | | | |
| | <10kHz | A or L | 0.006% + (0.004%+0.028%*F)/PF | | | |
| | 10k-115kHz | | 0.05% + (0.004%+0.028%*F)/PF | | | |
| | <10kHz | S | 0.01% + (0.004%+0.028%*F)/PF | | | |
| | 10k-115kHz | | 0.05% + (0.004%+0.028%*F)/PF | | | |
| | <10kHz | W | 0.015% + (0.004%+0.013%*F)/PF | | | |
| 10k-115kHz | 0.03% + (0.004%+0.013%*F)/PF | | | | | |
| 115k-435kHz | | 0.08% + (0.004%+0.013%*F)/PF | | | | |

2.5.1 PF MEASUREMENT ACCURACY TABLE

Add relevant errors from the table below for the maximum error in PF measurements. For PF_{FUND} apply only the Base Floor and Phase Errors.

Note: DC PF is 1.0 by definition and has no error; the table below applies to AC, AC+DC and FUND PF results.

| Specification | Channel Type | Option H | Option D HI Range | Option D LO Range | Option X HI Range | Option X LO Range |
|--|--------------|--|--|---|--|--|
| Base Floor Error Apply to all PF results | L | (56μA/A _{AC+DC}) + (45μV/V _{AC+DC}) | (38μA/A _{AC+DC}) + (45μV/V _{AC+DC}) | (250nA/A _{AC+DC}) + (45μV/V _{AC+DC}) | (6μA/A _{AC+DC}) + (45μV/V _{AC+DC}) | (0.15μA/A _{AC+DC}) + (45μV/V _{AC+DC}) |
| | A | (56μA/A _{AC+DC}) + (450μV/V _{AC+DC}) | (38μA/A _{AC+DC}) + (450μV/V _{AC+DC}) | (250nA/A _{AC+DC}) + (450μV/V _{AC+DC}) | (6μA/A _{AC+DC}) + (450μV/V _{AC+DC}) | (0.15μA/A _{AC+DC}) + (450μV/V _{AC+DC}) |
| | S or W | (225μA/A _{AC+DC}) + (1.8mV/V _{AC+DC}) | (150μA/A _{AC+DC}) + (1.8mV/V _{AC+DC}) | (1μA/A _{AC+DC}) + (1.8mV/V _{AC+DC}) | (23μA/A _{AC+DC}) + (1.8mV/V _{AC+DC}) | (0.6μA/A _{AC+DC}) + (1.8mV/V _{AC+DC}) |
| AC Floor Error Apply to all PF results using voltage and current AC Floor Error from previous tables, this error always causes a reduced PF reading | All | -PF _{RDG} *((Current AC Floor Error/A _{RDG}) + (Voltage AC Floor Error/V _{RDG})) | | | | |
| DC Floor Error Apply to AC+DC PF result after multiplying by (1-PF) | L | (0.23mA/A _{AC+DC}) + (0.1mV/V _{AC+DC}) | (0.15mA/A _{AC+DC}) + (0.1mV/V _{AC+DC}) | (1μA/A _{AC+DC}) + (0.1mV/V _{AC+DC}) | (40μA/A _{AC+DC}) + (0.1mV/V _{AC+DC}) | (5μA/A _{AC+DC}) + (0.1mV/V _{AC+DC}) |
| | A | (0.23mA/A _{AC+DC}) + (1mV/V _{AC+DC}) | (0.15mA/A _{AC+DC}) + (1mV/V _{AC+DC}) | (1μA/A _{AC+DC}) + (1mV/V _{AC+DC}) | (40μA/A _{AC+DC}) + (1mV/V _{AC+DC}) | (5μA/A _{AC+DC}) + (1mV/V _{AC+DC}) |
| | S | (0.45mA/A _{AC+DC}) + (3mV/V _{AC+DC}) | (0.3mA/A _{AC+DC}) + (3mV/V _{AC+DC}) | (2μA/A _{AC+DC}) + (3mV/V _{AC+DC}) | (80μA/A _{AC+DC}) + (3mV/V _{AC+DC}) | (6μA/A _{AC+DC}) + (3mV/V _{AC+DC}) |
| | W | (0.68mA/A _{AC+DC}) + (5mV/V _{AC+DC}) | (0.45mA/A _{AC+DC}) + (5mV/V _{AC+DC}) | (3μA/A _{AC+DC}) + (5mV/V _{AC+DC}) | (120μA/A _{AC+DC}) + (5mV/V _{AC+DC}) | (8μA/A _{AC+DC}) + (5mV/V _{AC+DC}) |
| Phase Error Apply to all PF results | S, A or L | (PF _{FUND} - cos(cos ⁻¹ (PF _{FUND}) ± 0.015°*F)) Alternately, as a worst case (at PF=0) this can expressed as F*0.00028 | | | | |
| | W | (PF _{FUND} - cos(cos ⁻¹ (PF _{FUND}) ± 0.007°*F)) Alternately, as a worst case (at PF=0) this can expressed as F*0.00013 | | | | |

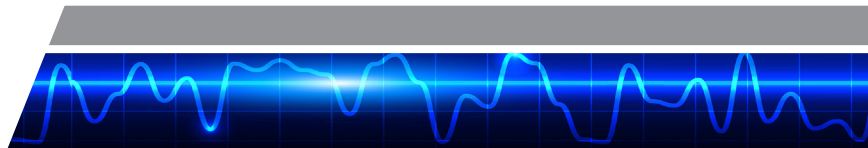

2.6 FREQUENCY MEASUREMENT SPECIFICATIONS

| | |
|-------------------------------|---|
| Frequency Range | FUND setting of MAINS: 45Hz to 65Hz FUND setting of AVIONICS: 300Hz to 900Hz Otherwise- LF/PERIOD setting of VLF: 0.0099Hz to 65Hz LF/PERIOD setting of LF: 0.19Hz to 1kHz LF/PERIOD setting of 300ms period: 9Hz to 305kHz (W channel type) or 80kHz (other channel types) LF/PERIOD setting of 100ms period: 19Hz to 305kHz (W channel type) or 80kHz (other channel types) LF/PERIOD setting of 20ms period: 44Hz to 305kHz (W channel type) or 80kHz (other channel types) LF/PERIOD setting of 10ms period: 145Hz to 305kHz (W channel type) or 80kHz (other channel types) LF/PERIOD setting of 2ms period: 495Hz to 305kHz (W channel type) or 80kHz (other channel types) If BANDWIDTH set to USER setting then upper limit is 0.5*setting |
| DC Level | DC offset is automatically eliminated |
| Min. Input (typical) | Voltage: 0.5Vrms (W, S or A channel type) or 75mVrms (L channel type) at fundamental Current, H option: 0.05Arms at fundamental Current, D option: 0.04Arms (HI range) or 0.3mArms (LO range) at fundamental Current, X option: 5mVrms (HI range) or 150µVrms (LO range) at fundamental |
| Min. Pulse Width (typical) | Greater of - 1.25µs (W channel type) or 5µs (other channel types) 0.001% of measurement period 10% of signal period |
| Update Period (nominal) | As shown below for FREQ SPEED settings of FAST/NORMAL/SLOW respectively - LF/PERIOD setting of VLF: greater of 1/2/15s or 1 cycle LF/ PERIOD setting of LF: greater of 1/1/5s or 1 cycle LF/ PERIOD setting of 300ms period: 0.25s/0.75s/2s LF/PERIOD setting of 100ms period: 55ms/250ms/1s LF/PERIOD setting of 20ms period: 25ms/200ms/700ms LF/PERIOD setting of 10ms period: 10ms/100ms/300ms LF/PERIOD setting of 2ms period: 2ms/50ms/150ms |
| Resolution | W Channel Type: 0.000125%/Update Period in seconds Otherwise: 0.0005%/Update Period in seconds |
| (nominal) Maximum | 0.01% + Resolution |
| Settling Time (nominal) Error | Greater of (x2 if significant DC content) - a) 2 amplitude periods b) 2 frequency measurement periods c) 4 cycles of the signal |

3 MECHANICAL CHANNEL INPUT AND ACCURACY SPECIFICATIONS

(MT TYPE)


3.1 INPUT CAPABILITIES AND CHARACTERISTICS

| | |
|---------------------|--|
| Input Terminals | SPD (Speed) : BNC (isolated from XT2640 chassis), configurable as analog or digital input TRQ (Torque) : BNC (isolated from XT2640 chassis), configurable as analog or digital input DIR (Direction) : BNC (isolated from XT2640 chassis), digital input |
| Input Common-Mode | Up to -15Vpk to +15Vpk specified Up to -30Vpk to +30Vpk with no damage |
| Analog Input Range | Up to -12Vdc to +12Vdc specified Up to -15Vpk to +15Vpk specified Up to -30Vpk to +30Vpk with no damage |
| Digital Input Range | LO: <0.8V (nominal) HI: >2V (nominal) Up to -30Vpk to +30Vpk with no damage |
| Input Impedance | Each input nominally 150kΩ to XT2640 chassis ground |

3.2 DIGITAL INPUT MEASUREMENT SPECIFICATIONS

| | |
|--------------------------|--|
| Digital Frequency Timing | Signal must be LO for >500ns Signal must be HI for >500ns Frequency measurement up to 500kHz (typically 900kHz) Minimum measurable frequency limited by user set measurement period |
| DIR Setup/Hold Timing | DIR must be stable for >550ns prior to and after active edge of SPD input |
| Maximum Frequency Error | Measurement Period >10ms: 0.01% Measurement Period ≤10ms: 0.015% |

Please visit www.vitrek.com for ordering information.

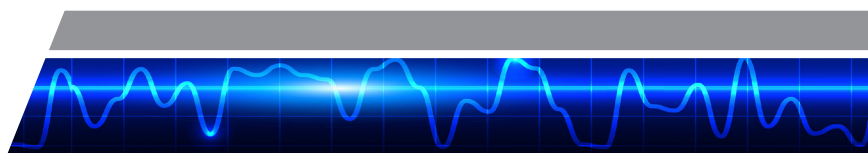

3.3 ANALOG INPUT MEASUREMENT SPECIFICATIONS

| | |
|---------------------|--|
| Maximum Input Error | 0.05% + 1mV Add (0.005% + 50µV) per C outside of ±5C from calibration temperature |
|---------------------|--|

4 ANALYSIS SPECIFICATIONS

4.1 INTEGRATION SPECIFICATIONS

| | |
|------------------|--|
| Start Delay Time | Zero to 99 days, 99 hours, 99 minutes, 99 seconds (1 second resolution) 0.01% + 8ms maximum error |
| Integration Time | Manual (unrestricted period of time), or 1 second to 99 days, 99 hours, 99 minutes, 99 seconds 0.01% + 1ms maximum error |
| Maximum Data | (0.01% + 1ms) (not for integrated average data) + (0.03/measurement period in seconds)% per year error |

4.2 HARMONIC ANALYSIS SPECIFICATIONS

| | |
|------------------------------------|--|
| Method | DFT performed at each frequency on same set of sampled signals (there is no discontinuity throughout the analysed frequency range) |
| Window Maximum | $F > (2/\text{measurement period})$: Hann (also called Hanning) Otherwise: Rectangular |
| Harmonic | The smaller of - a) A frequency of 435kHz (W type channels) or 115kHz (otherwise) b) 500 th (harmonics over the 100 th requires option H500) c) HARMONICS setting d) If BANDWIDTH set to USER: $0.5 \times \text{setting} / \text{fundamental frequency}$ |
| Harmonic Bandwidth | Nominally the greater of - a) The smaller of fundamental frequency or $2/(\text{LF}/\text{PERIOD measurement period})$ b) If FUND set to AVIONICS: 20Hz c) $(\text{Fundamental Frequency} \times \text{Maximum Harmonic}) / 2250$ |
| Measurement Period Update Interval | Nominally (1/Harmonic Bandwidth) Nominally the greater of - a) LF/PERIOD measurement period b) Harmonic Measurement Period (from above) c) $0.25\text{ms} \times \Sigma(\text{Maximum Harmonic for each channel configured for harmonics})$ |
| Data Available | Volts, Amps and Watts amplitudes for each configured harmonic Volts and Amps as a percentage of the fundamental of the same signal Volts and Amps THD as a percentage of the fundamental of the same signal Volts and Amps THD as a percentage of the AC+DC amplitude of the same signal V and A Phase of fundamental relative to the voltage fundamental of the lowest numbered channel in the VPA V and A Phase of each non-fundamental harmonic relative to the fundamental of the same signal |
| Accuracy | See relevant Voltage, Current and Watts accuracy specifications |


4.3 SPECTRUM ANALYSIS SPECIFICATIONS

| | |
|--------------------|--|
| Method | DFT performed at each frequency on same set of sampled signals (there is no discontinuity throughout the analysed frequency range) |
| Window | Hann (also called Hanning) |
| Frequency | 0.01Hz to 1kHz |
| Resolution | Nominally (1/ Frequency Resolution) |
| Measurement Period | Minimum is 100 x Frequency Resolution |
| Maximum Frequency | Maximum is the lowest of nominally - a) $16384 \times \text{Frequency Resolution}$ (under some circumstances as low as $8192 \times \text{Frequency Resolution}$) b) 435kHz (W type channels) or 115kHz (otherwise) |
| Data Available | Volts, Amps and Watts amplitudes for each configured spectrum |
| Accuracy | frequency See relevant Voltage, Current and Watts accuracy specifications |

4.4 CYCLE VIEW SPECIFICATIONS

| | |
|--------------|---|
| Signal Range | As specifications for Voltage and Current |
|--------------|---|

Please visit www.vitrek.com for ordering information.

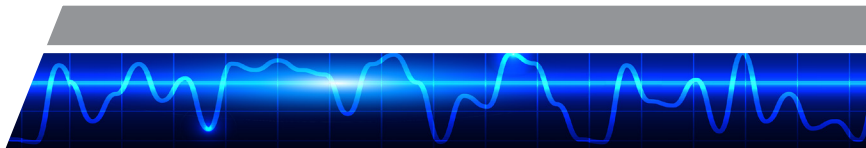

| | |
|-------------------|--|
| Cycle Period Time | From 2.3us (W type channels), 8.7us (otherwise) up to 100 seconds |
| Resolution Method | 1/512 th of a cycle |
| Maximum Error | Mean cycle formed by asynchronously sampling all cycles within measurement period As Voltage and Current Specifications for PK data (Watts = multiplication of V and A waveforms) |

4.5 SCOPE SPECIFICATIONS

| | |
|---------------------------|---|
| Signal Range | As specifications for Voltage and Current |
| Timebase | 1/2/5 settings from 5us/div to 20s/div |
| Capture Depth | Up to 32k points per signal |
| Capture Resolution | <0.00005% of specified maximum measurable peak Voltage or Current |
| Sampling Period (nominal) | Greater of - 1.1µs (W type channels) or 4.1µs (otherwise) 0.03% of timebase setting |
| Maximum Error | As Voltage and Current Specifications for PK data (Watts = multiplication of V and A waveforms) |

4.6 HISTORICAL DATA COLLECTION SPECIFICATIONS

| | |
|-----------------|---|
| Collection Time | Automatically continuously variable between 1 measurement period and 584.5 million years (collection is automatically stopped after this time has elapsed but this is untested at the time of writing) |
| Time | Note: this is the resolution by which you can determine when an event occurred, not that of the XT2640 detecting events. All events are captured. |
| Resolution | The greater of- a) 1 pixel of displayed data (front panel) or 1 increment of the requested time interval (interface) b) 1 measurement period of the data being recorded c) A maximum of 1/4096 th of the elapsed historical data collection time (typically 1/8192 th). |
| Data Capture | Every measurement is included in the maximum, average and minimum data for each increment of the time resolution interval regardless of the time resolution. |

4.7 DATA LOGGING SPECIFICATIONS

| | |
|---------------------------|---|
| Logged Measurements | Up to 16 measurement data per record (each of which can be 1 measurement or up to 500 harmonic measurements) |
| Data per Record | Up to 8003 data per record |
| Internal FIFO | 32Mbyte (always in binary format, 4 bytes per data) |
| Buffer Internal | ≥2Gbyte (always in binary format, 4 bytes per data) non-volatile Typically |
| Memory | 5Mbytes/sec maximum sustained mean write rate |
| External Data File Format | ASCII (CSV, scientific format) or Binary |
| Timestamp | Record number + optional date and time (1 second resolution) |
| Maximum File Size | 4Gbyte |
| Maximum Records | Only limited by maximum file size |
| Start Delay Time | Zero to 99 days, 99 hours, 99 minutes, 99 seconds (1 second resolution) 0.01% + 8ms maximum error |
| Run Time | Manual (unrestricted period of time), or 1 second to 99 days, 99 hours, 99 minutes, 99 seconds (1 second resolution) 0.01% + 8ms maximum error |
| Log Interval | 0.002 second, or 0.01 second to 99 hours, 99 minutes, 99.99 seconds (0.01 second resolution) 0.01% maximum error ± 2ms non-accumulating error |

